


OTHER CONSTRUCTION PRODUCTS



MONDO™ SKIMCOAT
Free Flowing Powder & Rendering Paste

MONDO™ LIQUID SEAL™
ELASTIC SEALANT
WATER-PROOFER

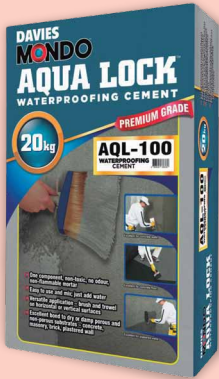

DAVIES SuperDry™
EXTREME
Latex Concrete
Waterproofer

MONDO™ AQUA LOCK™
Waterproofing
Cement

MONDO™ PLEXI-TITE™
Cementitious
Waterproofing
System

MONDO™

WORLD-CLASS BUILDING SOLUTIONS

DAVIES
Paint ReInvented

FLEX-IT™

2-PACK CEMENTITIOUS WATERPROOFING



Davies Paints Philippines, Inc.

1387 Mercedes Ave., San Miguel,

Pasig City 1600 M.M. Philippines

+632 8570 7000 • www.daviespaints.com.ph



Issue No. 1 March 2019





DAVIES MONDO™ FLEX-IT™ is a two-component cementitious waterproofing system designed to offer a perfect balance of performance features and mechanical properties. **DAVIES MONDO™ FLEX-IT™** imparts excellent substrate adhesion, high flexibility and elongation capable to bridge fine cracks in interior and exterior applications.

DAVIES MONDO™ FLEX-IT™ is supplied in a pre-packaged form with 2.5 liters Part A solution and 4.00 kg Part B cement. When mixed together with a slow-speed drill, the resulting fluid mix can be easily applied guaranteeing outstanding waterproofing properties.

USES

Flexible cementitious waterproofer suitable for:

- Bathrooms & toilet
- Basement / Terrace / Balcony
- Kitchen areas
- Roof gutters / Retaining walls
- Plant boxes
- Swimming pools
- Water tanks
- Fish ponds

APPLICATION INSTRUCTIONS:

SURFACE PREPARATION

1. Surfaces should be clean and dry, free from oil, grease, dust, dirt, loose materials, and other contaminants.
2. Surfaces must be flat with no peaks, hollows, and cracks.

SUBSTRATE	No. of Coats (Minimum Required Coating)	Sqm./coat/set	Sqm./set (Based on Required Number of Coating)
VERTICAL (FIREWALL, EXTERIOR WALLS, PLANTERS, BASEMENT)	2	8-10m²	4-5m²
HORIZONTAL (ROOFDECKS, BALCONY, LEDGES, BATHROOM & PARAPETS)	3	4-5m²	2-2.5m²

MIXING

1. With constant low-speed mixing, slowly pour Part A 2.50 liter contents into the 4.00 kilo Part B in the pail.
2. Mix thoroughly resulting in a homogeneous mixture with no lumps present.



APPLICATION

Paint Brush
Paint Roller



POT LIFE
2 hours @ 28°-30°C

FULL CURE
24 hours



DRYING TIME
Dry to touch
4-5 Hours

Workability
30-45 minutes

